

A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

PrintPRO 1000 iQ

Last Updated on 12.04.2021





The high end fume extraction system for wide format printers and the printing industry.

BOFA's PrintPRO 1000 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new PrintPRO 1000 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

More information about the Intelligent Operating System (iQ).

Technology



Intelligent Operating System (iQ)



DeepPleat DUO pre-filter



HEPA filter



Automatic flow control (AFC) technology



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



Patented technology



ProTECT service plan



SureCHECK quality standard

Key features of the PrintPRO 1000 iQ

iQ Operating System Standard

Reverse flow air technology Standard **High airflow and pressure rates** Standard

DeepPleat DUO pre-filter Standard

Contact BOFA at https://bofainternational.com/en/contact/

https://bofainternational.com/en/portal/datasheets/printpro-1000-iq/















Combined HEPA / gas filter incorporating ACF technology

Standard

Automatic flow control system

Standard

Independent filter condition monitoring, display and warnings

Standard

'Run safe' operation

Standard

VOC gas sensor (Volatile Organic Compound)

Optional

Filter change / system fail signal

Optional

On-board compressor

Optional

Filters with long life and low replacement cost

Standard

Real time airflow reading

Standard

High contrast display

Standard

Remote diagnostics via USB

Standard

Remote stop / start interface

Optional

Interfacing

Optional

Technical specification

1. IQ display

2. On / off switch

Castors

6. Door hinges

10 Door latch

9. Motor cooling inlet

3. Power cable

7. Hose inlet connection -


125mm

11. Motor cooling outlet

4. Signal / interface cable

8. Exhaust outlet


12. Standby button

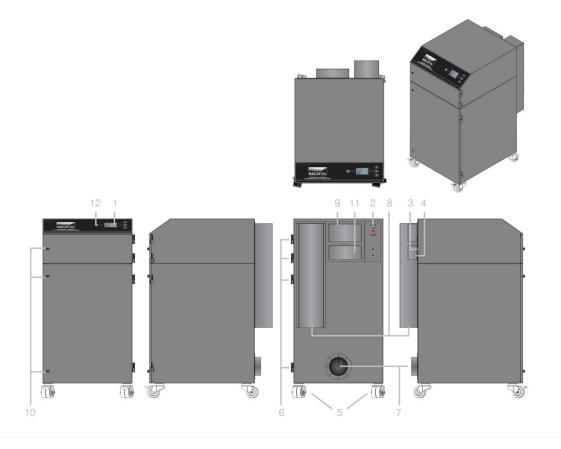

Airflow through filters Chemical filter HEPA filter Pre-filter





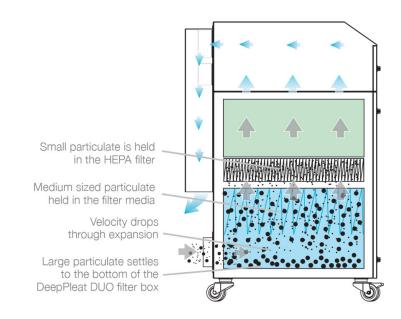

Technical data		
	EU	US
Dimensions (HxWxD)	1205 x 615 x 790mm	47.44 x 24.22 x 31.10"
Cabinet construction	Brushed stainless steel / powder coated mild steel	Brushed stainless steel / powder coated mild steel
Airflow / pressure	850m³/hr / 100mbar	500cfm / 100mbar
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw
Noise level	< 75dBA (at typical operating speed)	< 75dBA (at typical operating speed)
Weight	146kgs	322lbs
Approvals	UKCA and CE	cUL, UL*

Deeppleat pre-filter specifications	
Surface media area	30m² approx (322.8 ft²)
Filter media	Borosilicate
Filter media construction	Maxi pleat construction with glue bead spacers
Filter Housing	Zintec mild steel
Filter efficiency	95% @ 0.9 microns
Inlet size	125mm (0.41ft)
Dropout chamber size	58 litres
Filter media pleat size	200mm (0.65ft)

Combined HEPA / gas filter specifications		
Surface media area	7.5m² approx (80.7 ft²)	
HEPA filter media	Borosilicate	
HEPA media construction	Maxi pleat construction with glue bead spacers	
Filter housing	Zintec mild steel	

Combined HEPA / gas filter specifications		
Treated activated carbon	34kgs (74.8 lbs)	
Filter efficiency	99.997% @ 0.3 microns	

Unit part numbers		
Model	Voltage	Part no.
PrintPRO 1000 iQ Powder coated	230V	L4362
	115V	L4361

Options				
Model	24V stop / start	Filter change / system failure signal	VOC monitoring	On-board compressor
PrintPRO 1000 iQ Powder coated	A2001	A2002	A2003	A2007

Replacement filter part numbers		
Model	Part no.	Combined HEPA / gas filter
PrintPRO 1000 iQ	A1030222	A1030304

^{*} Tested to UL and cUL standards, but testing may be provided by alternate nationally recognised test laboratories. Certain product configurations may affect the UL certification. Please speak to your sales representative.

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

